



NIGHT FORCE™ NIGHT BOOMER™

- 1) S.A.D. (Strategic Air Defense)
OUTWARD RADAR SYSTEM
- 2) FORWARD THREAT WARNING,
ENEMY ENHANCEMENT COMPUTER
- 3) ANTI-BLAST, SILICONE REINFORCED
CANOPY WITH AUTO-EJECT
- 4) AIM-9 SIDEWINDER, HEAT-SEEKING
AIR-TO-AIR MISSILE
- 5) HIGH-INTENSITY, JET PROPULSION
SUCTION INTAKE
- 6) ELECTRONICALLY OPERATED,
UPPER ENGINE ACCESS PANEL
- 7) ARTICULATED HINGE-JOINT FOR
FIGHTER/INTERCEPTOR
IMPLEMENTATION
- 8) POSITIONABLE WING FOR
FAST-ATTACK, HIGH PURSUIT
COMBAT MISSIONS
- 9) AIM-54 PHOENIX, HEAT-SEEKING
AIR-TO-AIR MISSILE
- 10) DUAL, REAR RUDDERS FOR
INCREASED FIGHTER STABILITY
- 11) 4,000 lbs., FULL-THRUST, CYCLONIC
JET POWER PLANT
- 12) HIGH-SPEED AIR BRAKE FOR
EVASIVE, IN-AIR MANEUVERS

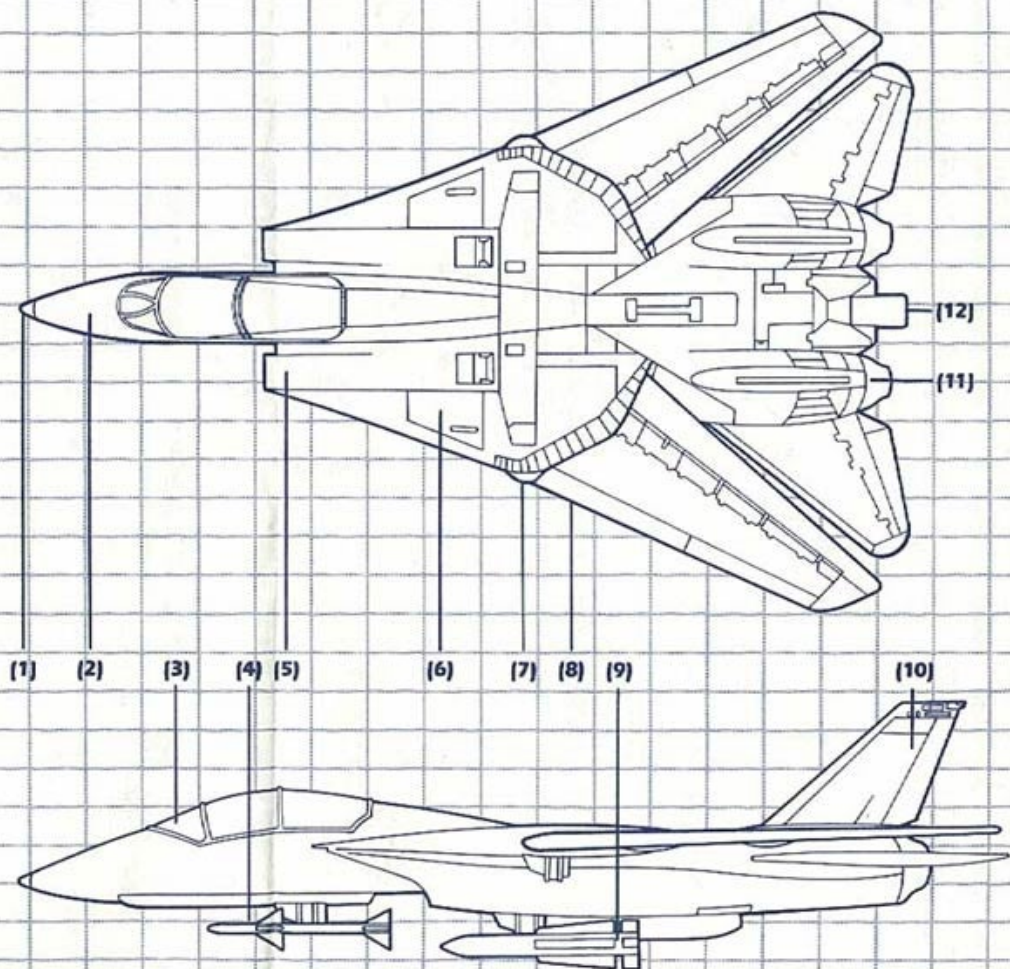


CANOPY/SEAT INSTALLATION

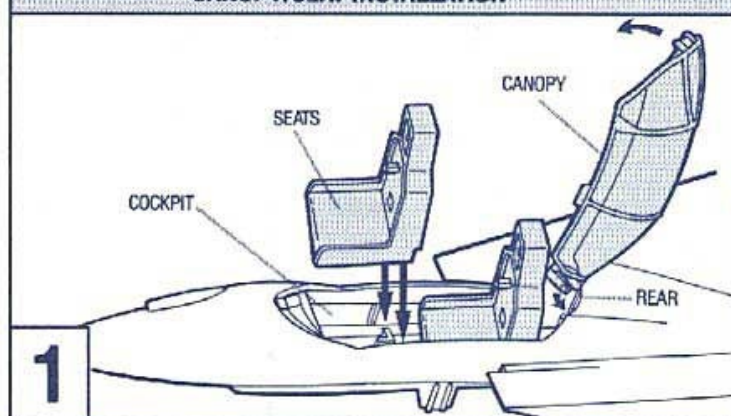


1

TAIL FIN/ENGINE/ENGINE DOOR ASSEMBLY

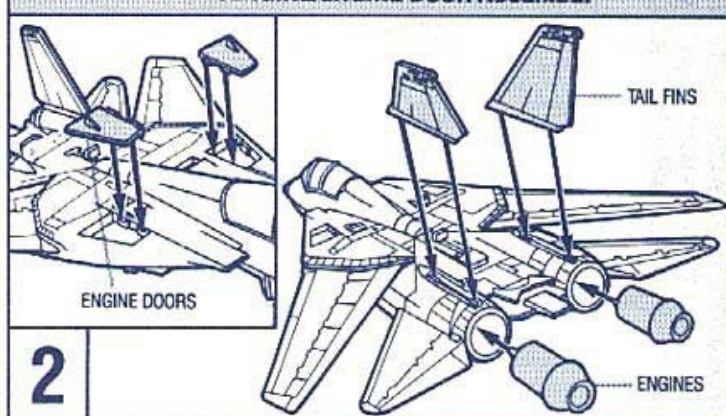


2

MISSILE IMPLEMENTATION

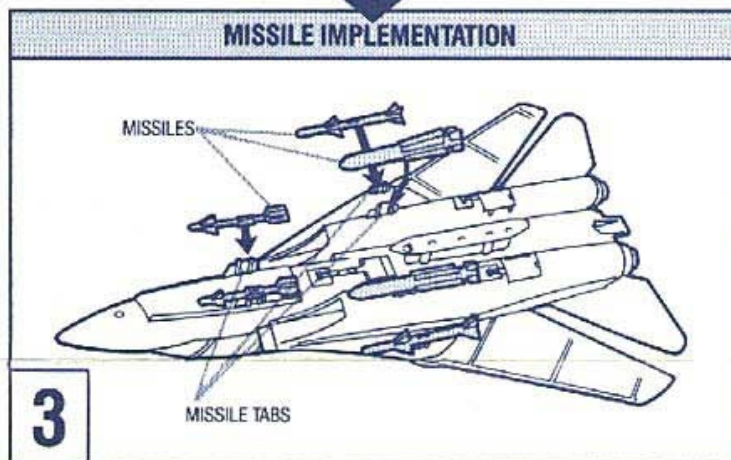


3

WING ADJUSTMENT IMPLEMENTATION

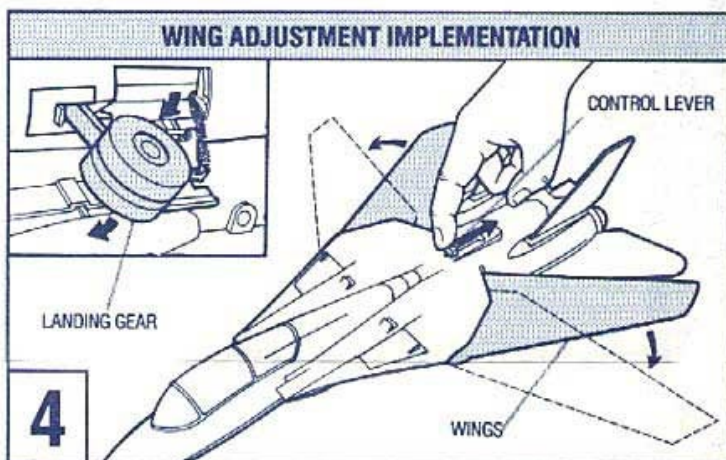

4

SPRING/LANDING GEAR REPLACEMENT

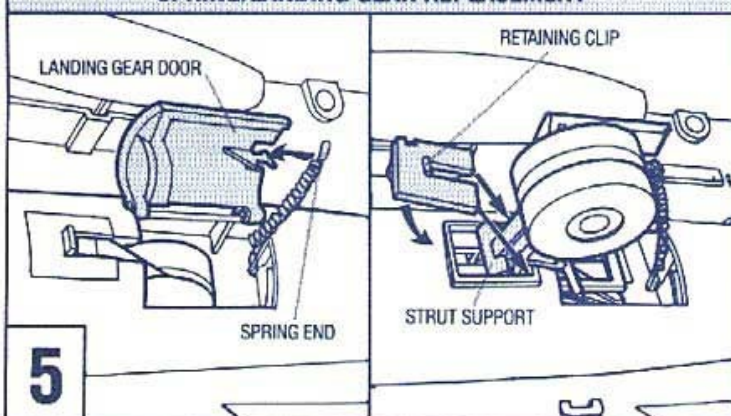

5

- 1 Fit cockpit seats into notches in cockpit as shown. Fit canopy into notch in cockpit rear as shown. Swing down canopy front end and snap into hole in cockpit front. (ILL. 1)
- 2 Snap the tabs on the tail fins into the slots in the rear of the jet. Slide the two engines into the engine openings in the fuselage. Place the two tabs on engine doors into the slots above the engine detail. Snap engine doors down. (INSET) (ILL. 2)
- 3 Remove missiles from runners and place over the missile tabs located under the jet. (ILL. 3)
- 4 Now you're ready for pretend flight! For take-off and landing, slide the control lever toward the rear of the jet. This drops the wheels and sweeps the wings out to balance the jet. Then as you're approaching high altitude, slide the lever forward. This sweeps the wings in and makes the landing gear retract. (ILL. 4)
- 5 If spring on landing gear door becomes unattached from door, fit spring end over post on rear section of door as shown. If landing gear strut becomes unattached from fuselage bottom, fit strut through hole in fuselage as shown. Snap retaining clip around strut support as indicated. (ILL. 5)

Peel and apply labels as shown.

