
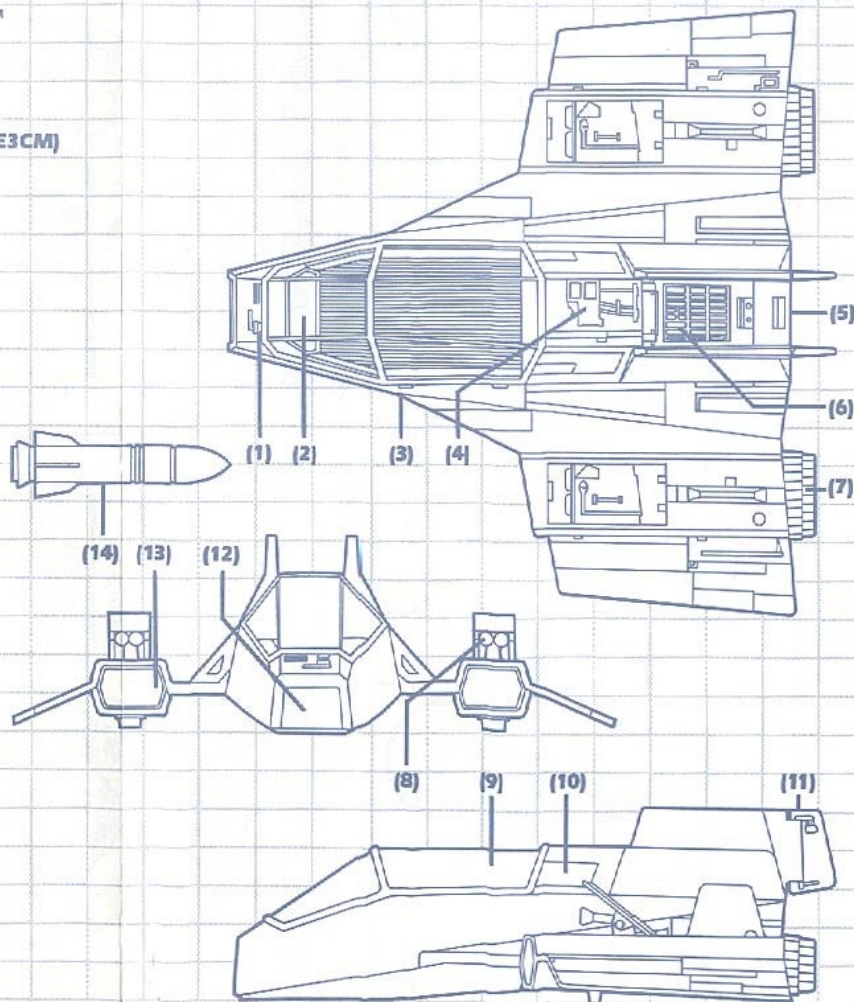









SKY PATROL™ SKY SHARC™

- 1) WATER/ATMOSPHERE ANALYZERS
- 2) TARGET ACQUISITION/PILOT VISION SYSTEM
- 3) BORON-EPOXY, TITANIUM FRAME CONSTRUCTION
- 4) EXTERNAL, ELECTRONIC ENGINE CONTROL MODULE (E3CM)
- 5) MAIN ENGINE HEAT DISSIPATOR
- 6) ENGINE COMPARTMENT, VENTILATOR SCREEN
- 7) CERAMIC LAMINATE EXHAUST NOZZLES
- 8) TWIN, 30mm, COMPRESSION PROJECTED CANNONS
- 9) IMPACT-RESISTANT, TINTED GULLWING CANOPY
- 10) EMERGENCY CANOPY RELEASE ACCESS HATCH
- 11) MAIN VERTICAL STABILIZERS/GUIDANCE RUDDERS
- 12) TUNGSTEN MAIN RUNNING LIGHT
- 13) PRIMARY WATER/ATMOSPHERE FEEDERS
- 14) SERIES 1, ACOUSTIC, ASW MISSILE

Peel and apply labels as shown.

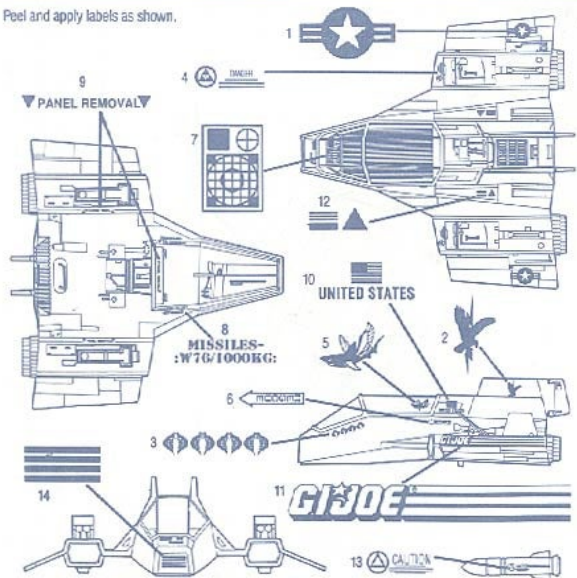

Contains: Lower & upper hulls, cockpit, canopy, 2 action levers, engine cover, right & left torpedo halves, 2 torpedo nose covers, 2 torpedo tail rings, 2 torpedo tail rings, 2 rudders, 2 twin cannons, 2 engine intakes, 2 wing cannon doors, 2 engine exhausts, label sheet, instructions and blueprints.

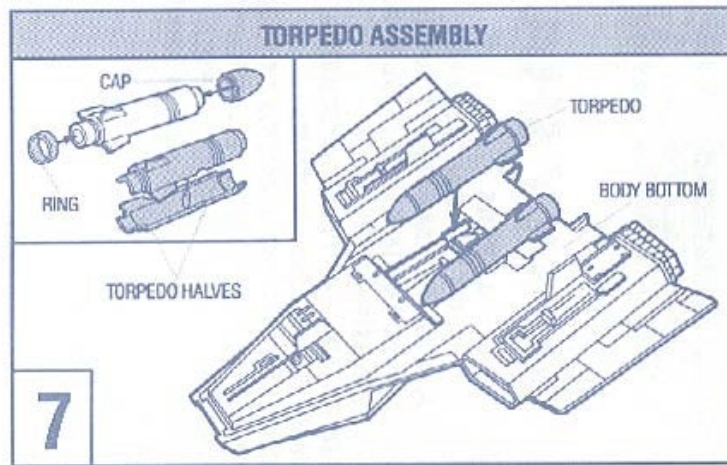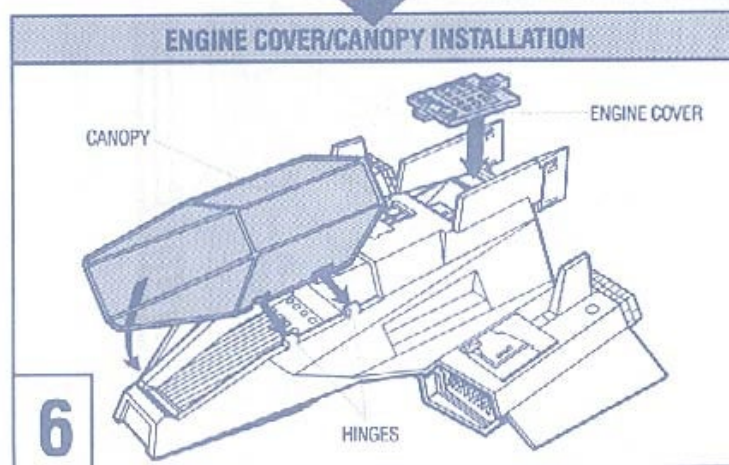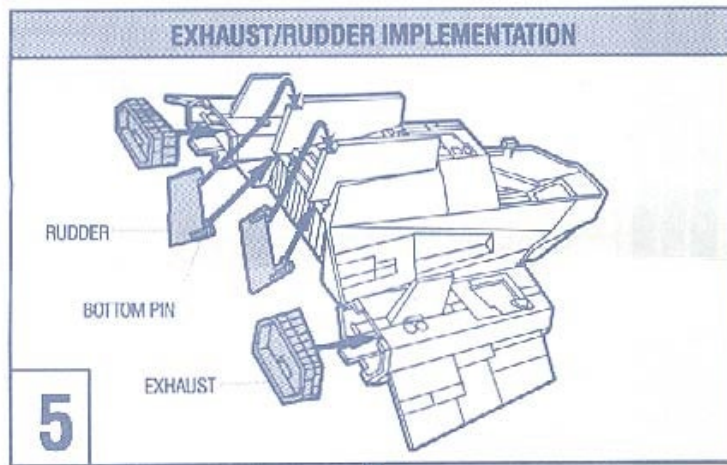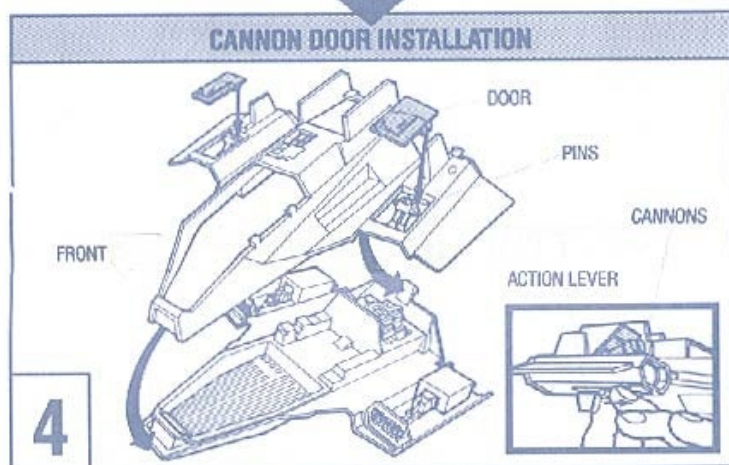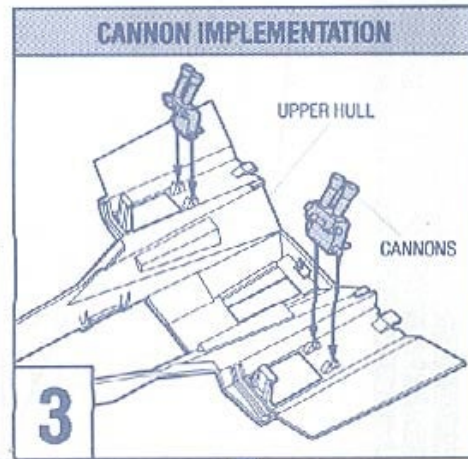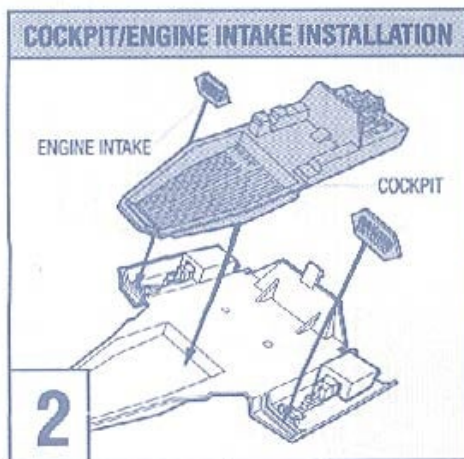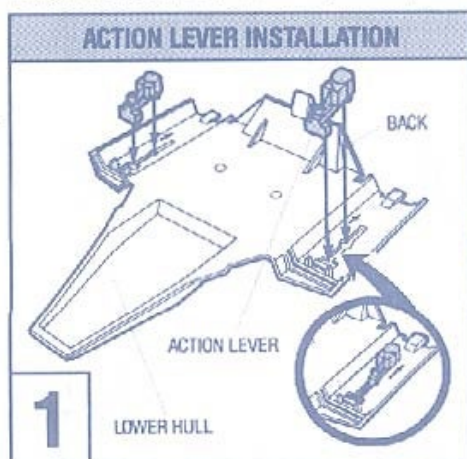

1 Fit action levers into slots in lower hull as shown. Slide them all the way to the back. (ILL. 1)

2 Fit cockpit into place. Place engine intakes into position. Put lower hull aside. (ILL. 2)

3 Snap cannons into upper hull with posts facing rear. (ILL. 3)

4 Snap cannon doors onto pins on cannons and close doors. First hook front tab of upper hull under front of lower hull. Then snap back and slide tabs into position. To operate cannons, slide action levers. (ILL. 4)

5 Attach exhaust to hulls as shown. Place bottom pin of rudder into hole on back of hull as shown. Snap top pin into top hole. Repeat with other rudder. (ILL. 5)

6 Snap engine cover over engine with handle toward rear. Press canopy posts with your thumbs into hinges in hull. (ILL. 6)

7 Press torpedo halves together. Press cap over front and snap ring over back of torpedo. Fit torpedo over post on body bottom. Repeat with other torpedo. (ILL. 7)