
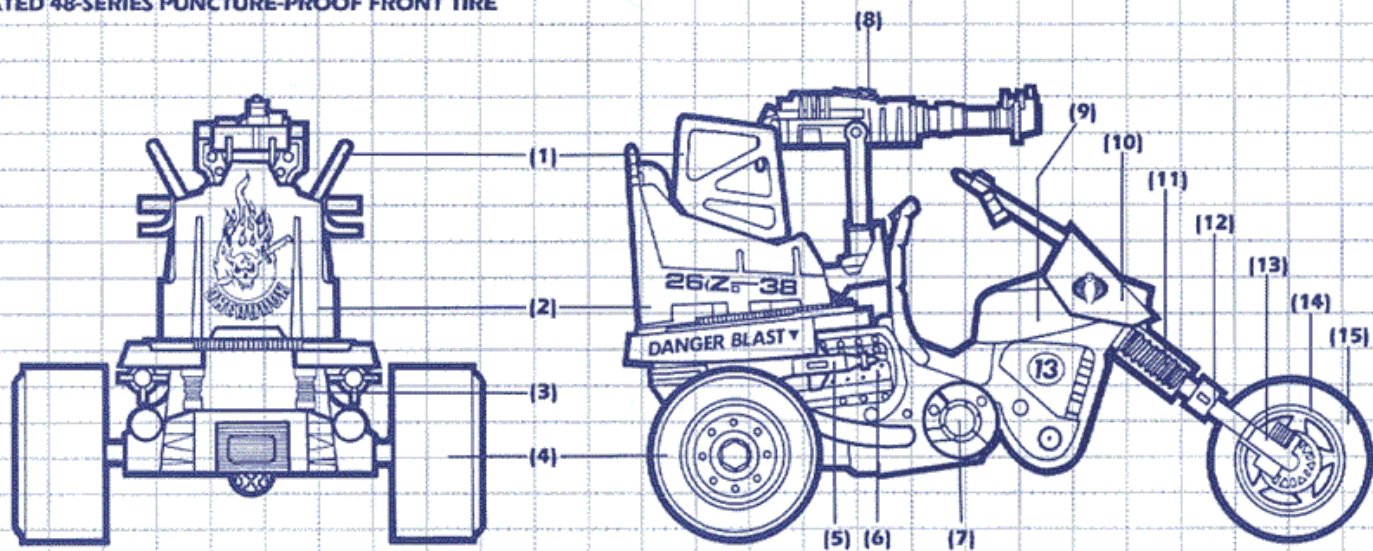



DREADNOK TRI-CYCLE

- 1) REINFORCED ALUMINUM ALLOY DEFLECTOR SHIELDS
- 2) 360° ROTATION GUN SEAT
- 3) BOX-SECTION TRANSAXLE SUPPORT MEMBERS
- 4) "SUPER SLICK" PUNCTURE-PROOF REAR TIRES
- 5) WAAM (WIDE AREA ANTI-ARMOR MISSILE) LASER-GUIDED MISSILE
- 6) LIQUID-COOLED DOHC 16-VALVE ENGINE
- 7) SELF-ADJUSTING HYDRAULIC CLUTCH
- 8) "BLAZING" SHOCK-DAMPENED 106M RECOILLESS RIFLE
- 9) LAYERED-COMPOSITE SHELL/POLY-SAC FUEL CELL
- 10) FRAME MOUNTED FRONT FAIRING
- 11) AIR-ADJUSTABLE REBOUND DAMPENED SHOCKS
- 12) "SAN FRAN" STYLE CHOPPED FRONT FORK
- 13) DUAL-DISC ANTI-DIVE FRONT BRAKES
- 14) ALUMINUM ALLOY 16" FRONT WHEEL
- 15) V-RATED 48-SERIES PUNCTURE-PROOF FRONT TIRE

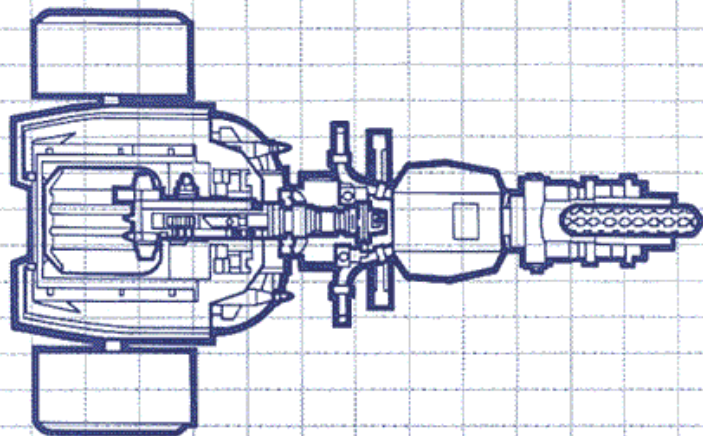


Remove all pieces from plastic frames. If you have difficulty, use safety scissors.


DREADNOK TRI-CYCLE INSTRUCTIONS

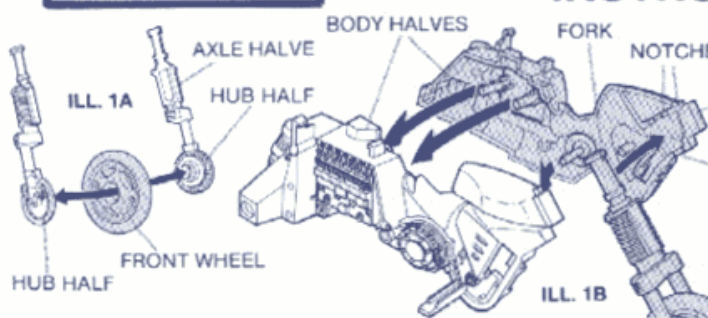


- 1 Place front wheel over hub half. Snap hub halves together until locked. (ILL. 1A) With tab facing downward, insert fork into hole between body halves as shown. Line up fork with notches in body half and snap halves together. (ILL. 1B)

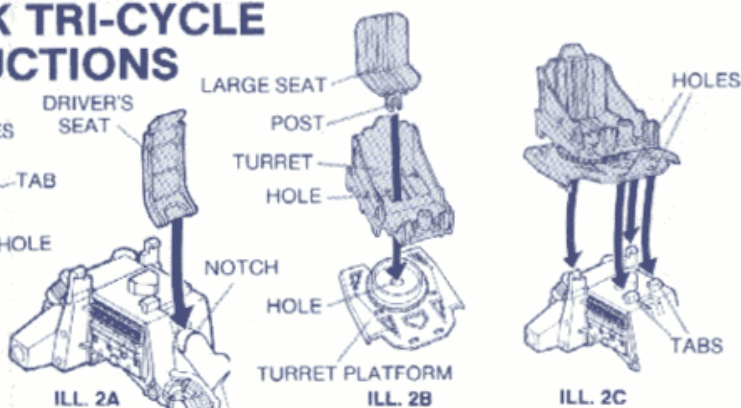


- 2 Place driver's seat into notch in body. (ILL. 2A) Place post on large seat through square hole in turret. Snap post through hole in turret platform. (ILL. 2B) Snap 4 holes in turret platform over 4 tabs behind driver's seat. Make sure all 4 tabs lock into place. (ILL. 2C)

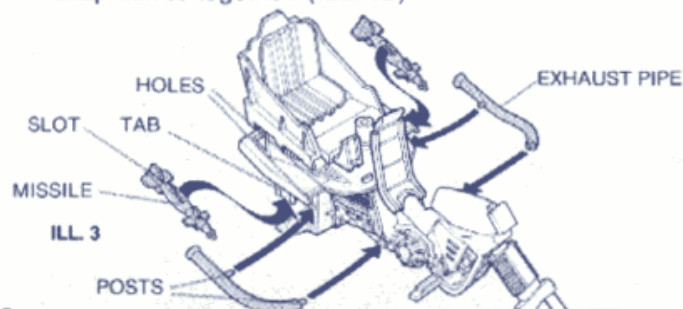


- 3 Fit posts on exhaust pipes into holes on each side of body. Fit missile slots over tabs underneath each side of turret platform. (ILL. 3)

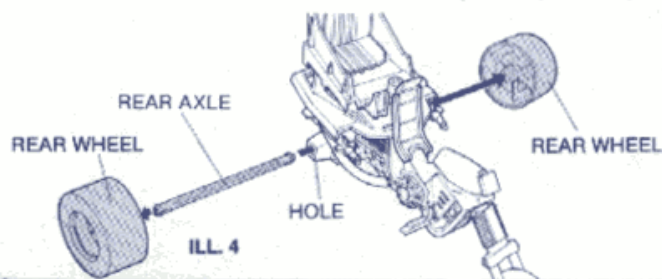


- 4 Snap rear axle through INSIDE of one rear wheel. Insert other end of axle through hole in rear of body. Snap other rear wheel over axle. (ILL. 4)

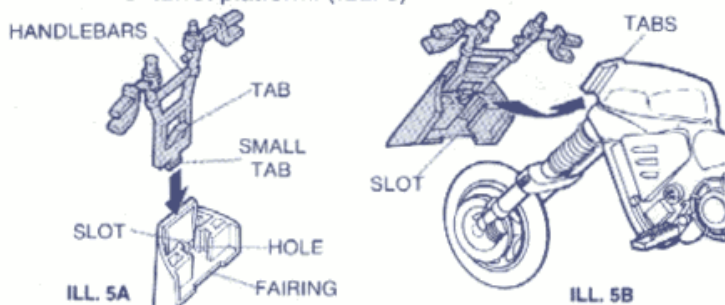


- 5 A. With tab on handlebars facing you, slide handlebars through slot in fairing and snap small tab through hole. (ILL. 5A)
B. Slide slot in fairing up over tabs on front of body as shown. (ILL. 5B)

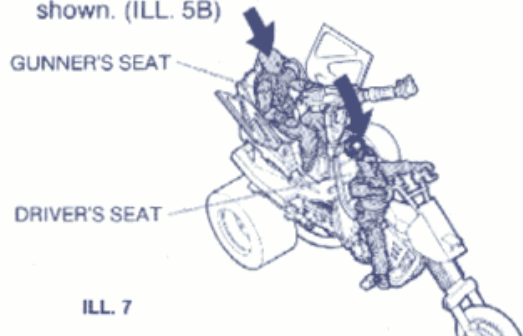

- 7 Place Dreadnok figure in driver's seat and place his hands on handlebars. Place a second Dreadnok figure in gunner's seat with his hand on machine gun controls! (ILL. 7) (Figures not included.)

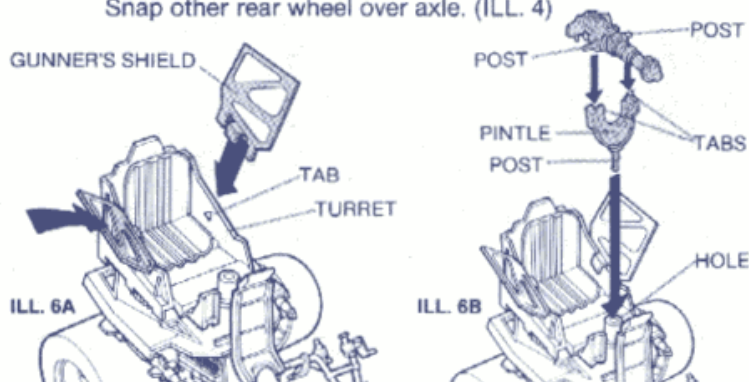

- 6 Snap gunner's shields over tabs on each side of turret as shown. (ILL. 6A) Snap machine gun posts into tabs on each side of gun pintle. Snap pintle post into hole in turret. (ILL. 6B)

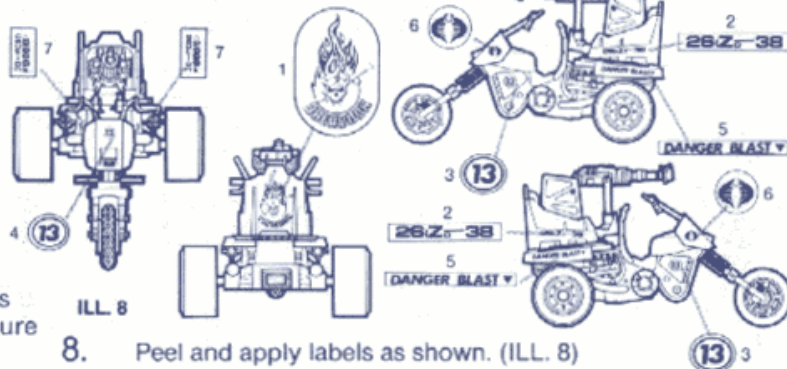

- 8 Peel and apply labels as shown. (ILL. 8)