





DREADNOK GROUND ASSAULT 4WD VEHICLE

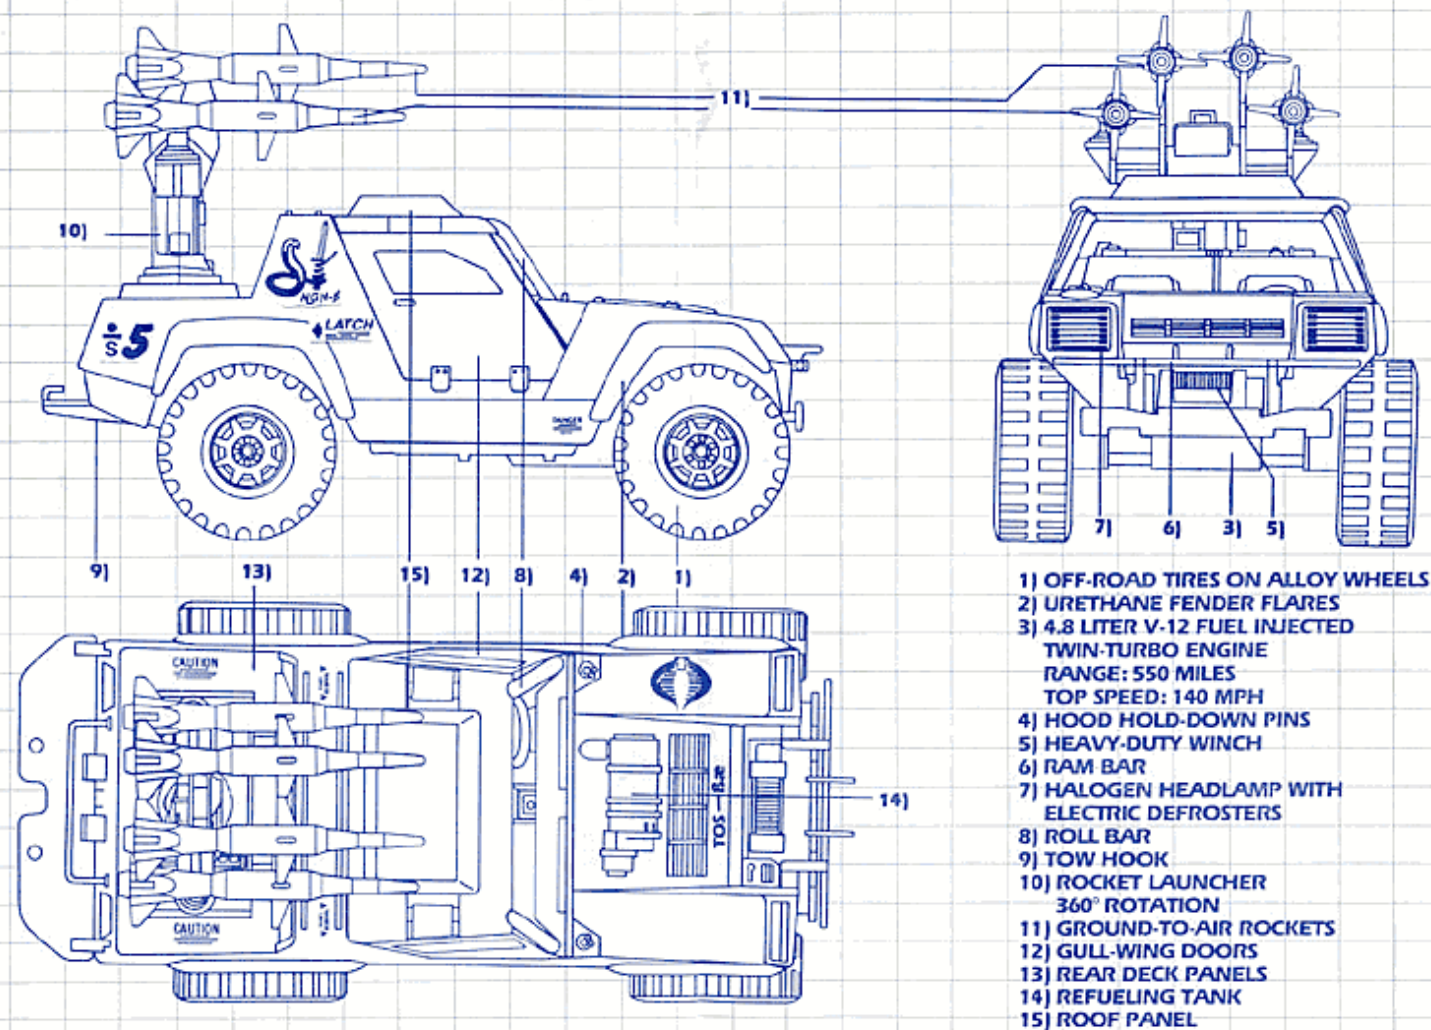


DREADNOK GROUND ASSAULT MOTORCYCLE

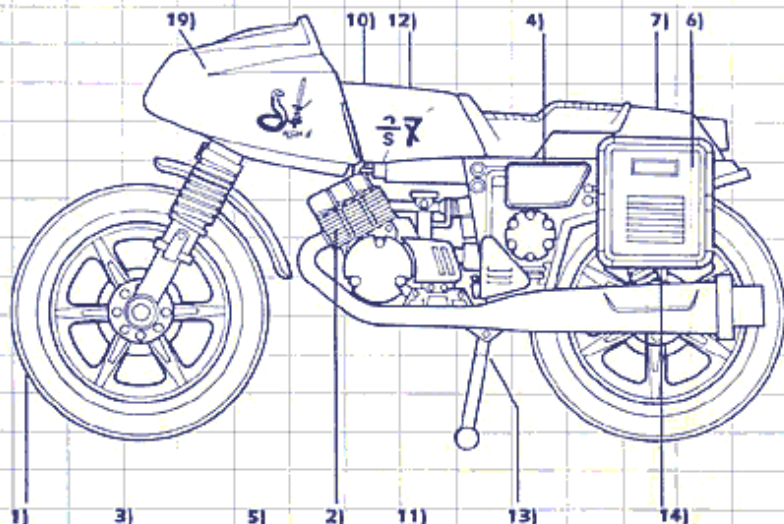

- 1) SELF-SEALING TIRES ON MAGNESIUM WHEELS
- 2) 1000 CC TWIN CAM ENGINE
FUEL INJECTED
TURBOCHARGED
- 3) SADDLEPAKS
- 4) AID KIT
- 5) TOOLCASE
- 6) WEAPONS AND SMALL ARMS CASE
- 7) EXPLOSIVES AND ELECTRICAL GEAR CASE
- 8) HALOGEN HEADLAMP
- 9) ANTI-REFLECTIVE MATTE PANEL
- 10) ANALOG INSTRUMENTATION
- 11) RADOME (ELECTRONIC RADAR UNIT)
- 12) SELF-SEALING FUEL BLADDER
- 13) SUPPORT STAND
- 14) HEAVY DUTY REAR SHOCK ABSORBERS
- 15) DUAL STRUT FRONT SUSPENSION
- 16) 20 MM ELECTRONIC CANNON
- 17) ELECTRONIC CONTROL COMMAND BOX
- 18) ELECTRONICS LINKAGE
- 19) AERODYNAMIC FAIRING

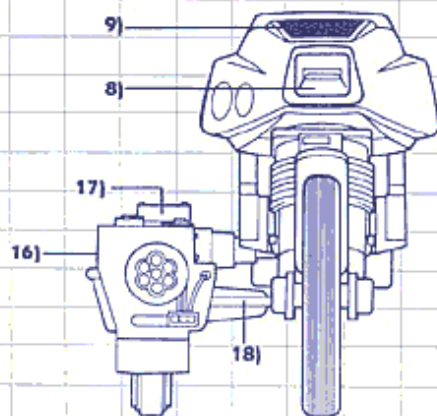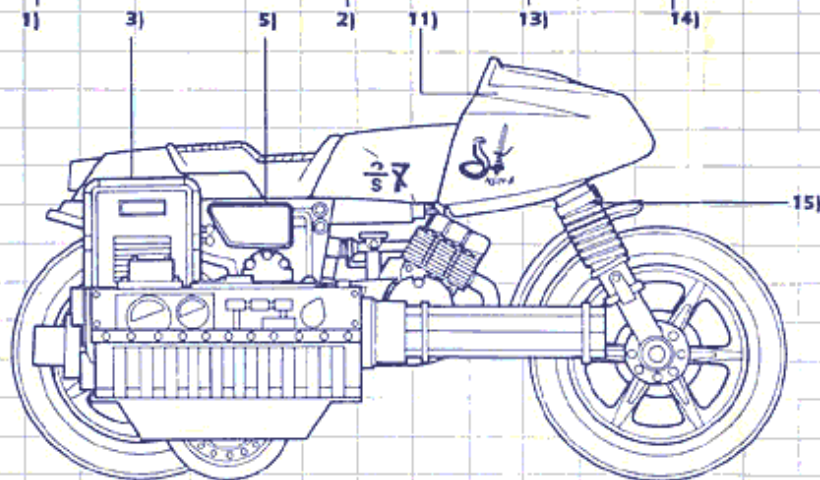


DREADNOK GROUND ASSAULT 4WD VEHICLE INSTRUCTIONS

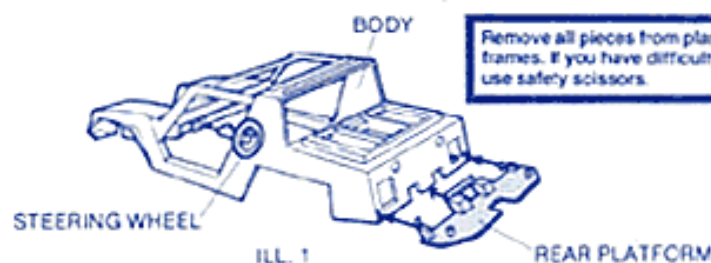


- 1 Line up tab on steering wheel column with slot in dashboard. Press steering wheel firmly into place. Insert rear platform into rear of body as shown. (ILL. 1)



- 2 Press tab on front of body into hole in chassis. Snap rear end of body into chassis. (ILL. 2)

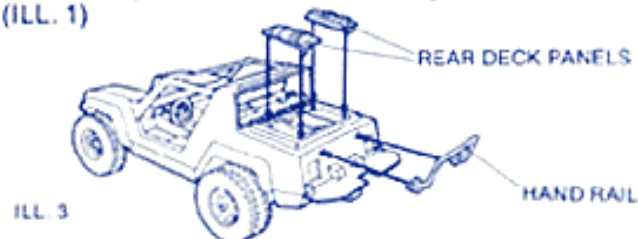


- 3 Snap rear deck panels onto rear of body. Press rear hand rail into slots in back of body. (ILL. 3)

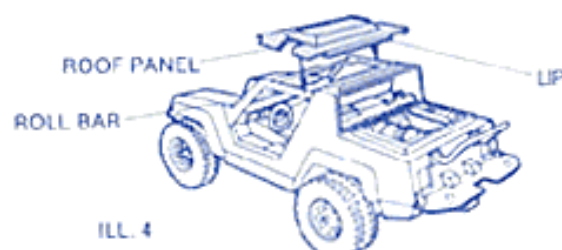


- 4 Place lip of roof panel under back of roof frame and snap front roof panel down onto roll bar as shown. (ILL. 4)



- 5 Snap doors onto roll bar as shown. (ILL. 5)

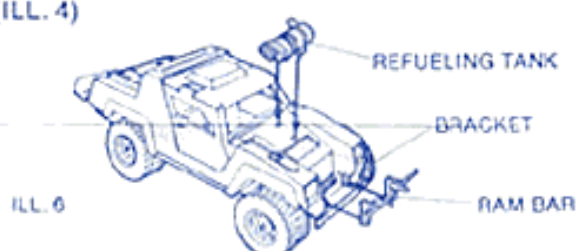


- 6 Snap refueling tank onto hood. Insert one side of ram bar into bracket on front of body. Flex other side into opposite bracket. (ILL. 6)

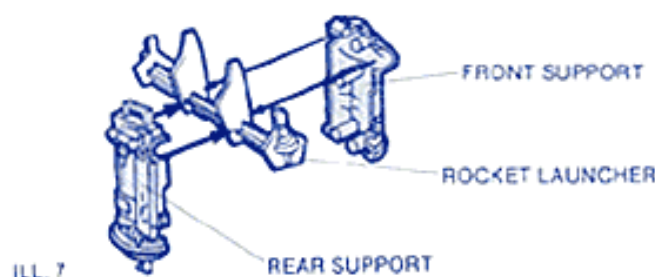


- 7 Trap rocket launcher between the front and rear of rocket launcher support. Snap closed. (ILL. 7)



- 8 Line up tab on rocket launcher support with slot in body as shown. (ILL. 8) Insert and twist to lock assembly into place. Press rockets onto launcher. Place Dreadnok figure into the driver's seat. (Figure sold separately) Photochromic roof and deck panels, doors and ram bar change color when exposed to radiant energy!


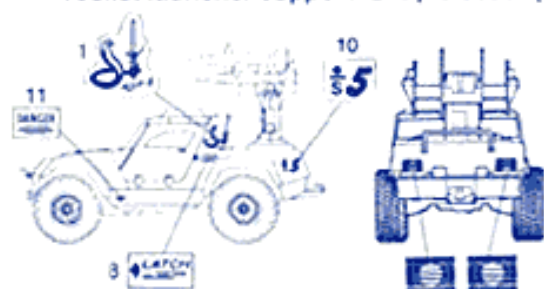


- 9 Peel and apply labels as shown.

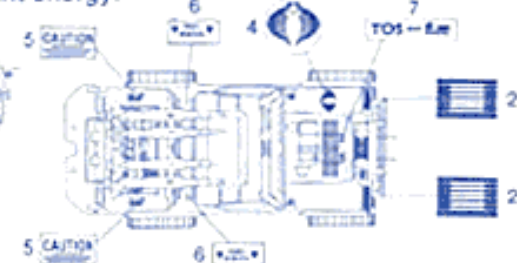


DREADNOK GROUND ASSAULT MOTORCYCLE INSTRUCTIONS

Remove all pieces from plastic frames. If you have difficulty, use safety scissors.

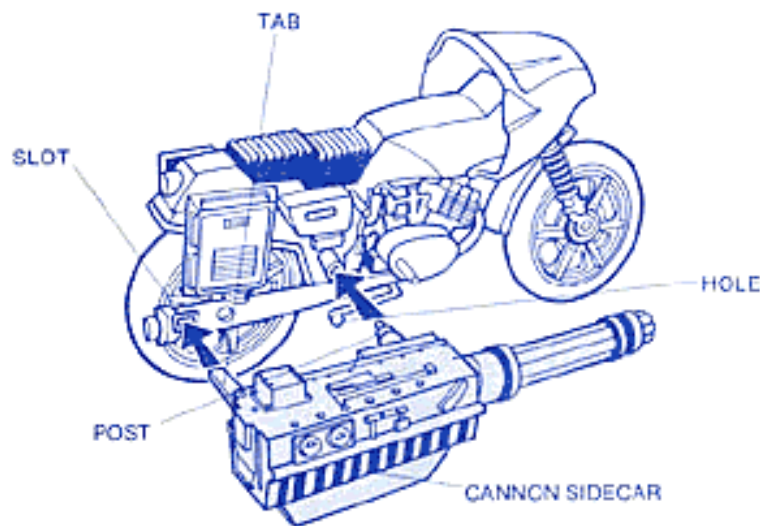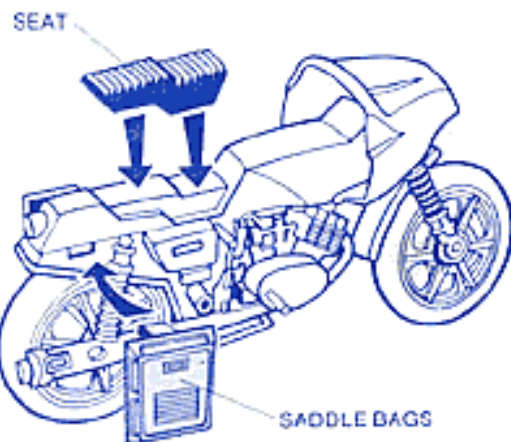

- 1 Snap seat onto motorcycle. Press tabs of saddle bags into slots on each side of motorcycle. (ILL. 2)
- 3 Peel and apply labels as shown. Fold kickstand down when not being used.

- 2 To attach cannon sidecar, insert post and tab on cannon into hole and slot in rear side of motorcycle. (ILL. 3)

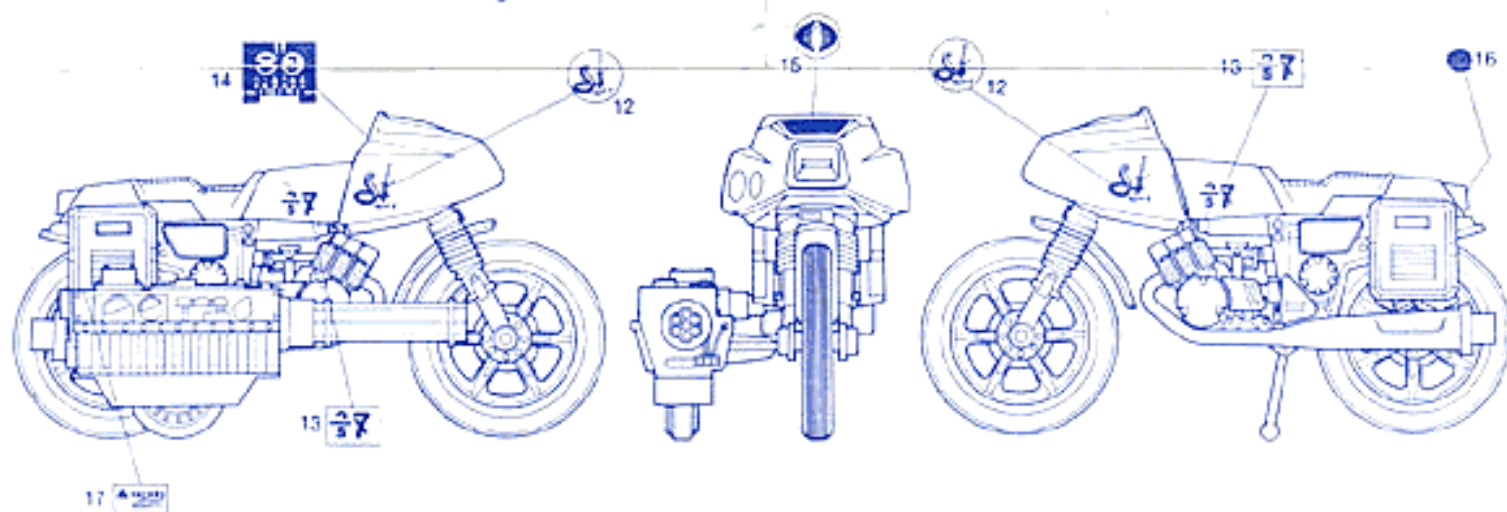

HOW TO PLACE DREADNOK FIGURE ON MOTORCYCLE (Figure sold separately)

- 4 Use 2 posts on either side of motorcycle to hold Dreadnok figure in place. Position right foot so that it passes under the right front post and in front of the right rear post. Repeat with left foot and left posts. Bend figure forward so that hands fit under fairing. Now, he's ready to ride! NOTE: Front wheel of motorcycle turns freely from side to side. The Dreadnok Motorcycle has special features that change color when exposed to radiant energy! The seat, wheels, saddle bags, kickstand and sidecar are all photochromic!

